

8 7 6 5 4 3 2 1

D

D

C


C

B

B

A

A

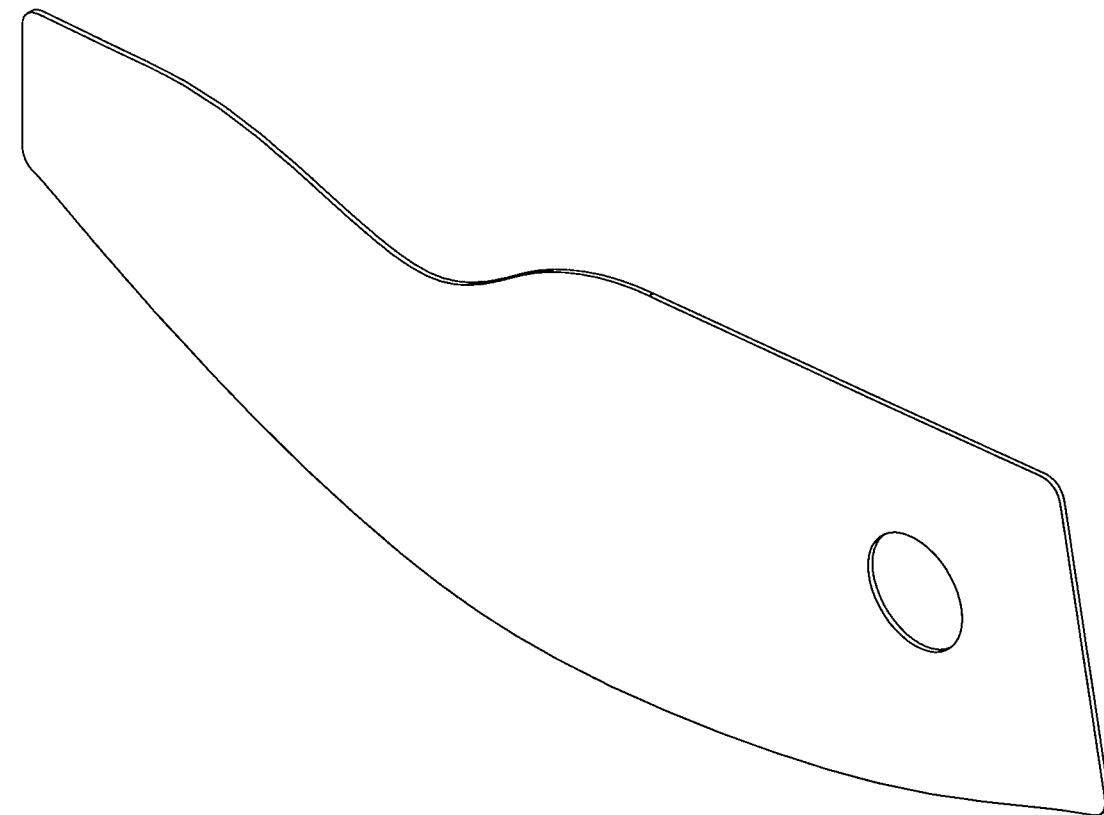

D3702-1 FORWARD DOUBLER

RELEASED
09/04/09 JP

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T62) ALUMINUM SHEET, 0.080 THICK PER AMS-QQ-A-250/11 OR AMS 4025 OR AMS 4027 (REF. DART SPEC. M6061T6S.080)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3702-1" USING FINE POINT PERMANENT INK MARKER
- 7) WEIGHT: D3702-1 = 0.39 lbs
- 8) MANUFACTURE PART FROM "D3702-1.DXF" FILE

B	Ø1.375 WAS Ø1.25 (ZN B5-2) REASON: HOLE ENLARGED FOR INSTALLATION OF GROMMET	MB	08.07.10
A	NEW ISSUE	MB	08.04.30
REV.	DESCRIPTION	BY	DATE
DESIGN	1b	DART AEROSPACE LTD	
DRAWN	2	HAWKESBURY, ONTARIO, CANADA	
CHECKED	AB	DRAWING NO.	REV. B
MFG. APPR.	AB	D3702	SHEET 1 OF 2
APPROVED	AB	TITLE	SCALE
DE APPR.	AB	FORWARD DOUBLER	NTS
DATE	08.07.10	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

8 7 6 5 4 3 2 1

